




ASTRONERGY

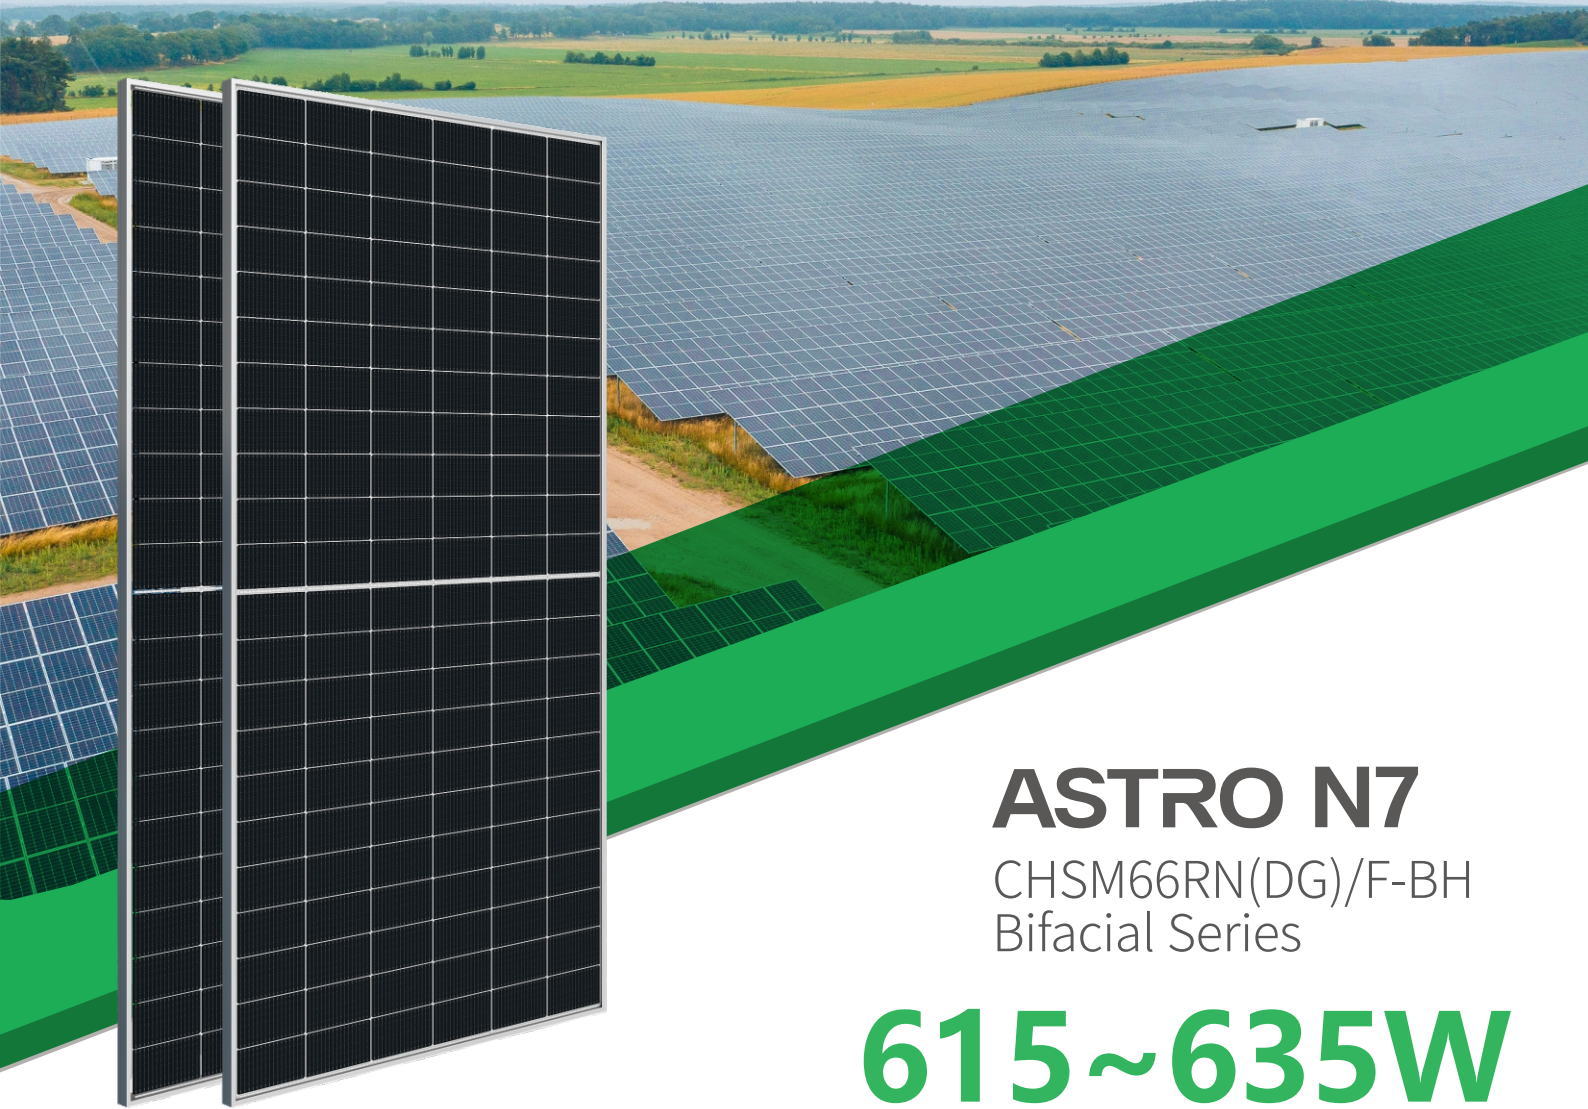

ASTRO N7

CHSM66RN(DG)/F-BH
Bifacial Series

615~635W




Warranty

15

15-year Product Warranty

30

30-year Linear Power Warranty

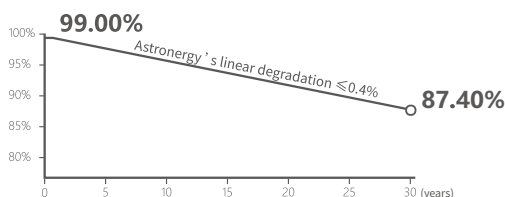

PID Resistance

Excellent PID resistance, meeting higher standards for particularly harsh environments.



SMBB Design

Enhancing current collection, minimizing power loss



Low Voc Design

Increasing modules per string, lower BOS cost



Bifacial Power Generation

Maximizing bifaciality, boosting backside power output



IEC 61215, IEC 61730
ISO 9001:2015:ISO Quality Management System
ISO 14001:2015:ISO Environment Management System
ISO 45001:Occupational Health and Safety
The first solar company which passed the Nord IEC/TS 62941 certification audit



Tier 1
BloombergNEF



615~635W

POWER RANGE

0~+3%

POWER SORTING

23.5%

MAX. MODULE
EFFICIENCY

≤ 1.0%

FIRST YEAR
POWER DEGRADATION


≤ 0.4%

YEAR 2-30
POWER DEGRADATION

Mechanical Specifications

Outer dimensions (L x W x H)	2382 x 1134 x 30 mm
Cell type	n-type mono-crystalline
No. of cells	132 (6*22)
Frame technology	Aluminum, silver anodized
Front / Back glass	2.0+2.0 mm
Cable length (Including connector)	Portrait: (+)350 mm, (-)250 mm; Customized length
Cable diameter (IEC/UL)	4 mm ² / 12 AWG
① Maximum mechanical test load	5400 Pa (front) / 2400 Pa (back)
Connector type (IEC/UL)	HCB40 (Standard) / MC4-EVO2A (Optional)
Module weight	32.5kg
Packing unit	36 pcs / box
Weight of packing unit (for 40'HQ container)	1220 kg
Modules per 40' HQ container	576 pcs (Subject to sales contract)

① Refer to Astronergy crystalline installation manual or contact technical department.
Maximum Mechanical Test Load=1.5×Maximum Mechanical Design Load.

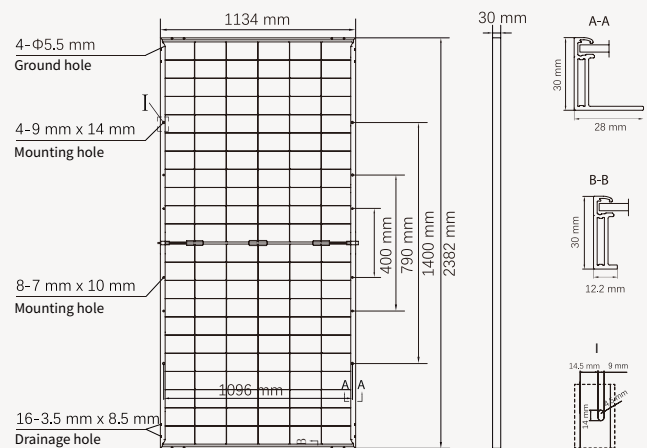

Electrical Specifications

STC: Irradiance 1000W/m², Cell Temperature 25° C, AM=1.5

Rated output (P _{mpp} / Wp)	615	620	625	630	635
Rated voltage (V _{mpp} / V)	41.43	41.56	41.69	41.82	41.95
Rated current (I _{mp} / A)	14.84	14.92	14.99	15.07	15.14
Open circuit voltage (V _{oc} / V)	48.89	49.04	49.19	49.34	49.49
Short circuit current (I _{sc} / A)	16.02	16.11	16.19	16.27	16.35
Module efficiency	22.8%	23.0%	23.1%	23.3%	23.5%

NMOT: Irradiance 800W/m², Ambient Temperature 20° C, AM=1.5, Wind Speed 1m/s

Rated output (P _{mpp} / Wp)	462.5	466.2	470.0	473.8	477.5
Rated voltage (V _{mpp} / V)	39.00	39.12	39.24	39.36	39.48
Rated current (I _{mp} / A)	11.86	11.92	11.98	12.04	12.09
Open circuit voltage (V _{oc} / V)	46.44	46.58	46.72	46.86	47.01
Short circuit current (I _{sc} / A)	12.94	13.00	13.07	13.13	13.20

Electrical Specifications (Integrated power)

P _{mpp} gain	P _{mpp} / Wp	V _{mpp} / V	I _{mp} / A	V _{oc} / V	I _{sc} / A
5%	646	41.43	15.59	48.89	16.83
10%	677	41.43	16.33	48.89	17.63
15%	707	41.43	17.07	48.89	18.43
20%	738	41.43	17.81	48.89	19.23
25%	769	41.43	18.55	48.89	20.03

Electrical characteristics with different rear power gain (reference to 615W)


Temperature Ratings (STC)

Operating Parameters


Temperature coefficient (P _{mpp})	-0.29%/°C	No. of diodes	3
Temperature coefficient (I _{sc})	+0.043%/°C	Junction box IP rating	IP 68
Temperature coefficient (V _{oc})	-0.25%/°C	Max. series fuse rating	35 A
Nominal module operating temperature (NMOT)	41±2°C	Max. system voltage (IEC/UL)	1500V _{DC}

Curve

Current-Voltage (615W)

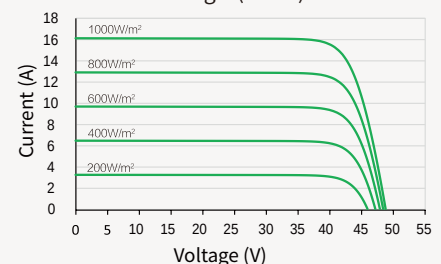

Power-Voltage (615W)

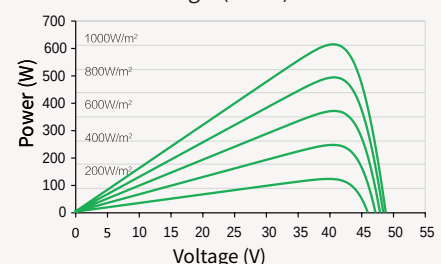

Current-Voltage (615W)

