



2322301303_Split Phase Bus Cable(12AWG,TC,2m)



CHANGE NO.	CHANGE CONTENTS	REV	NAME/DATE
(1)	Update electrical parameters and cable	0.1	LJ 2019-2-26
(2)	update dimensions, update part name, update electrical parameters	0.2	WT 2022-6-13

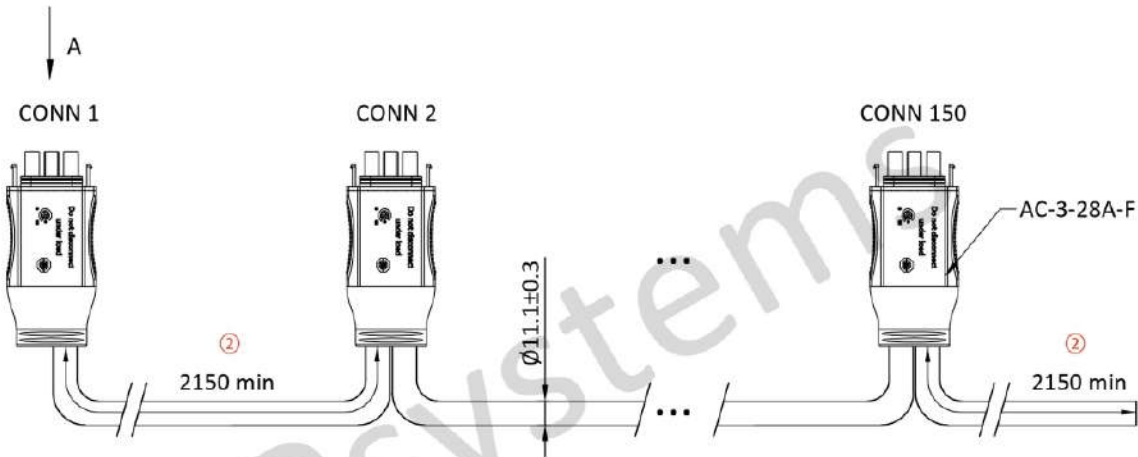

- Notes:**
1. Cable marking: E489601 TYPE TC-ER 3C/12AWG 90°C WET OR DRY 600V --- c TYPE CIC 90°C 600V FT4 DIR BUR SUN RES -40°C COLD BEND HWATEK
 2. Waterproof rating: IP67
 3. A series of bus cable contains 150 connectors, each connector spacing is 2150mm
 4. Wiring: BLACK-L1, RED-L2, GREEN-PE
 5. Electrical parameters:
Working voltage rating: 600V
Working current rating cable 28A
Resistance voltage: AC 2500V 50mA 1 Minute
Conductor resistance: 5.43Ω/km
 6. Use blank cartons for packaging

TOLERANCES UNLESS OTHERWISE SPECIFIED				MATERIAL		
>0-100	±5	>2500-3500	±45			
>100-500	±10	>3500-4500	±50			
>500-900	±15	>4500-5500	±65			
>900-1300	±25	>5500-6500	±80			
>1300-1800	±30	>6500-8000	±90			
>1800-2500	±35	>8000-10000	±100			
DWN.		UNIT	mm			
CHK.		SHEET	OF	REV.	0.2	

NAME

Split Phase Bus Cable (12AWG,TC,2m)

DRAWING NO.