

Performance Features



- Safe, reliable, easy-to-install solution for string wire management
- 40+ year lifetime
- No tools required
- Excellent corrosion resistance
- High mechanical strength
- Highly flexible installation method

Detail

Specification See Configuration Table

Part Number	Below	Aluminum	20lbs	3mm
Material	UL1565(CSA 22.2 No. 18.5-22)			
Certified Load Rating	UL2239(CSA 22.2 No. 18.4-15)			
Wire Diameter	Varies			
Certifications	Wrap cable and secure by feeding the smaller loop through the larger loop			
Cable Capacity	5 to 20 grams, depending on Part Number			
Installation Method				
Part Weight				
Shipping and Packaging	Bulk packed in box			

Product Views

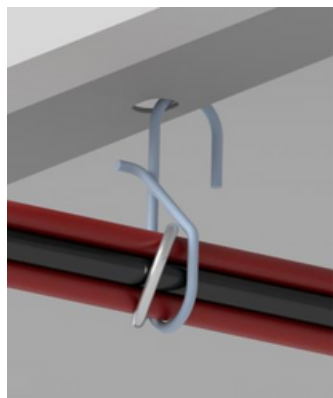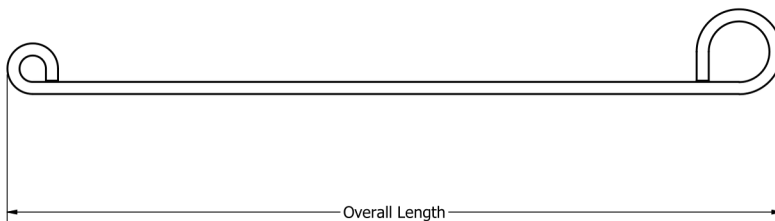

Can be used to secure cabling to Bonsai Hangers



Can be used to secure cable together between CMS Hangers

Configuration Table*

Part Number	Overall Length
32-0244-08	203mm [8in]
32-0244-16	406mm [16in]
32-0244-22	559mm [22in]
32-0244-24	607mm [24in]
32-0244-32	812mm [32in]

*Extended/intermediate lengths available upon request