


N-Type CleanEdge GSN7S54T [420-440W]

CleanEdge TOPCON Single Glass Module

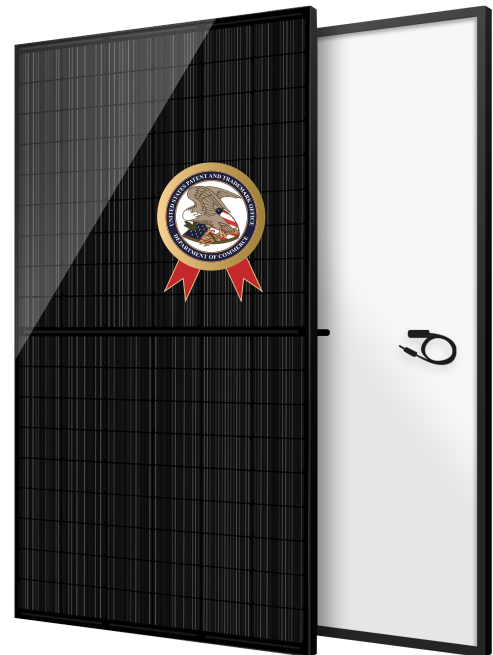

IEC 61215 / IEC 61730 / UL 61730

ISO9001: 2015: Quality Management System

ISO14001:2015: Environment Management System

ISO45001:2018: Occupational Health And Safety Management System



KEY FEATURES



CleanEdge

No water and dust, which reduces the power loss, increases power generation by 6-15%



Lower Attenuation

Components have better reliability and lower LID/LETID attenuation



Visual all-black

All-black design, more harmonious and beautiful application scene



Wider Application

No water-permeability and high wear-resistance, can be widely used in high-humid, windy and dusty area



PID Resistance


Excellent Anti-PID performance guarantee via optimized mass-production process and materials control

Guaranteed Power Performance

25 Years Product Warranty

30 Years Linear Power Warranty

0.40% Annual Degradation Over 30 Years

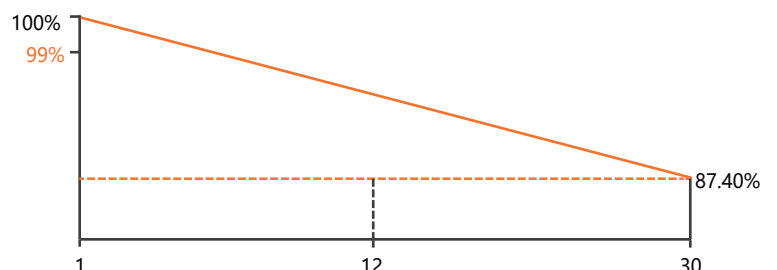

As different markets have different certification requirements, please consult our G-Star sales group to obtain the corresponding certification for the local market. If any special requirements are needed for the specific installing environment, please feel free to contact G-star technical support department anytime.

GSN7S54T

420-440W

CleanEdge TOPCON Single Glass Module

Weight


21 kg

Dimensions

1722*1134*32mm

Packaging

34pcs/pallet, 884pcs/40'HQ Container

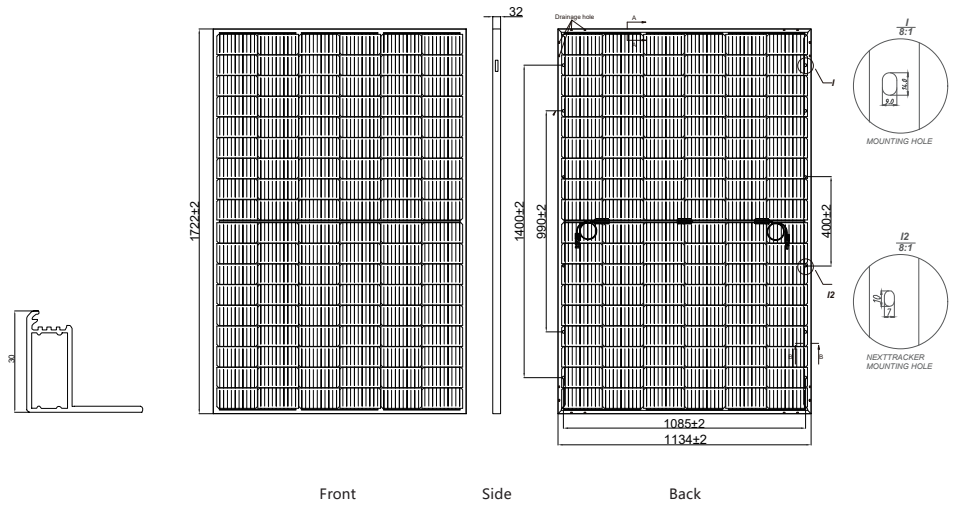

Front Side Back

OPERATING CONDITIONS

Operating Temperature	-40°C~+85°C
Maximum System Voltage	1500V/DC(IEC)
Maximum Series Fuse Rating	30A
Power Tolerance	0~+3%
Temperature Coefficients Of Pmax	-0.30%/°C
Temperature Coefficients Of Voc	-0.25%/°C
Temperature Coefficients Of Isc	0.046%/°C
Nominal Module Operating Temperature(NMOT)	43±2°C

MECHANICAL CHARACTERISTICS

Cell Type	N type Monocrystalline 182*91mm
No. Of Cells	108 pcs in series (6x18)
Front Glass	3.2mm, Anti-Reflection Coating
Backsheet	White
Frame	Anodized Aluminium Alloy,silver or black
Junction Box	IP68 ,3Bypass Diodes
Output Cables	300mm in legh or Customized Length
Connectors	MC4-EVO2
Mechanical Load	5400Pa(Front)/2400Pa(Back)

ELECTRICAL PARAMETERS AT STC

Module Type	GSN7S54T-420BB	GSN7S54T-425BB	GSN7S54T-430BB	GSN7S54T-435BB	GSN7S54T-440BB
Maximum Power(Pmax)	420	425	430	435	440
Maximum Power Voltage (Vmp)	31.51	31.70	31.88	32.06	32.24
Maximum Power Current (Imp)	13.33	13.41	13.49	13.57	13.65
Open-Circuit Voltage (Voc)	38.11	38.30	38.49	38.68	38.87
Short-Circuit Current (Isc)	14.07	14.15	14.23	14.31	14.39
Module Efficiency STC (%)	21.51%	21.76%	22.02%	22.28%	22.53%



STC: Irradiance 1000W/m²,AM=1.5, Cell temperature 25°C.

ELECTRICAL PARAMETERS AT NMOT

Maximum Power(Pmax)	318	322	326	330	334
Maximum Power Voltage (Vmp)	30.97	31.15	31.33	31.51	31.69
Maximum Power Current (Imp)	10.27	10.35	10.41	10.48	10.54
Open-Circuit Voltage (Voc)	37.84	38.02	38.2	38.38	38.56
Short-Circuit Current (Isc)	10.80	10.88	10.94	11.01	11.07

NMOT: Irradiation 800W/m²,AM=1.5, Cell temperature 20°C.

IV-CURVE

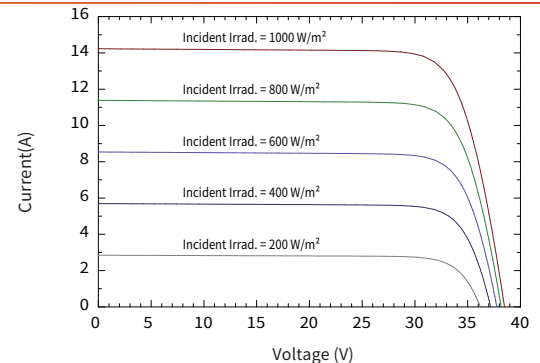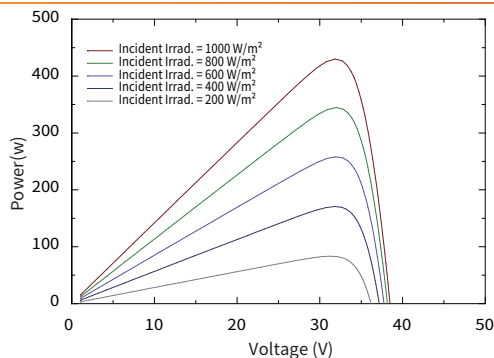

Gstar

E-mail: info@gstar-solar.com
Website: www.gstarsolar.com

Due to ongoing innovation, R&D enhancement, the specification and key features described in this datasheet may deviate slightly and are not guaranteed. G-Star reserves the right to make any adjustment to the information described herein at any time without notice. Please always obtain the most recent version of the datasheet which shall be duly incorporated into the binding contract made by the parties governing all transactions related to the purchase and sale of the products described herein.